



SHOWROOM PANEL

The **SHOWROOM PANEL** is specifically designed to impress, casting even and wide-ranging luminance down on cars, trucks, vans and other large objects. The **SHOWROOM PANEL** is an EOS 'complete solution,' meaning that it delivers at the job site to your spec, ready to be installed without any additional assembly, wiring or hassles.

This decorative lighting solution is both attractive and functional, with a maximum size of 118.125" x 240", and is constructed of an EOS FABRIK overlay with LEDs.



Auto
Dealerships



Custom Art
Displays



Retail




Commercial
Interior




Gallery Displays


- White or Printed Stretch Fabric
- Dedicated White, Tunable White, RGB or RGBW
- **90+ CRI** Standard, Premium **95+ CRI** Available at Additional Cost
- Multiple Mounting options
- 24VDC
- Indoor Rated
- Max size: 118.125" x 240" ; inquire for larger sizes
- 700 Lumens per square foot @ 6000K

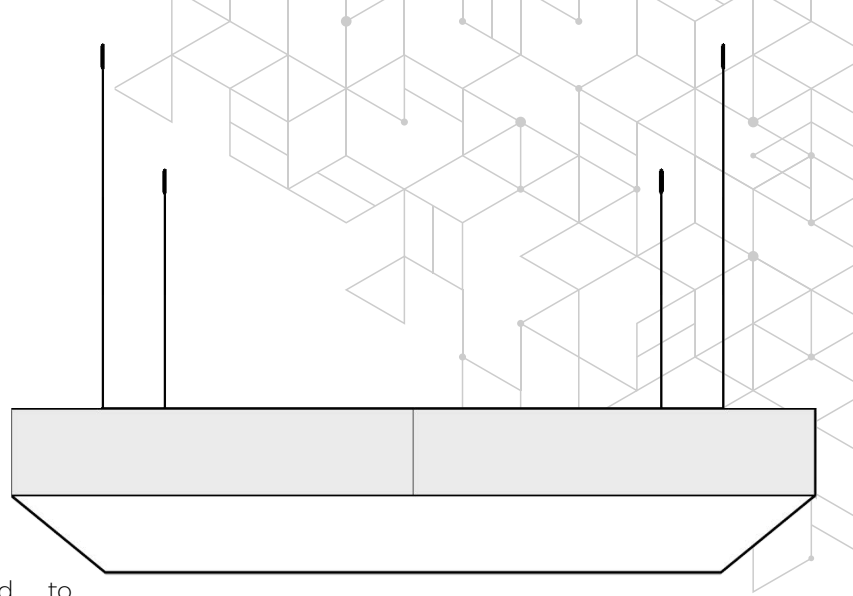

Front View:

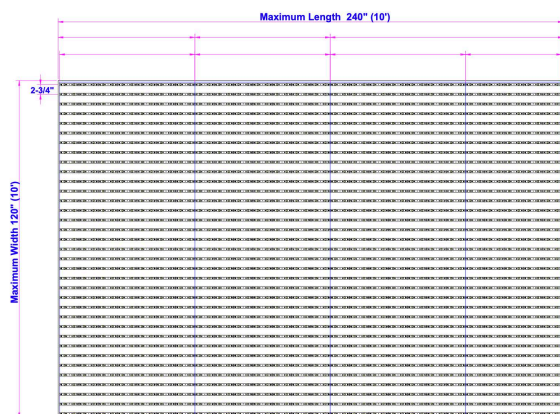


Back View:

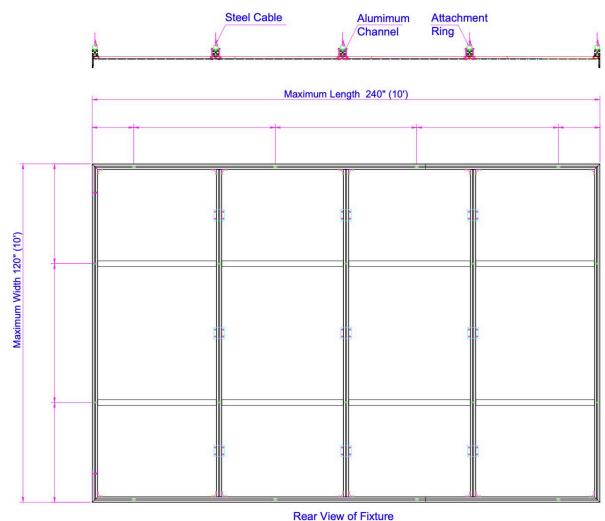



SHOWROOM PANEL

Installation methods:

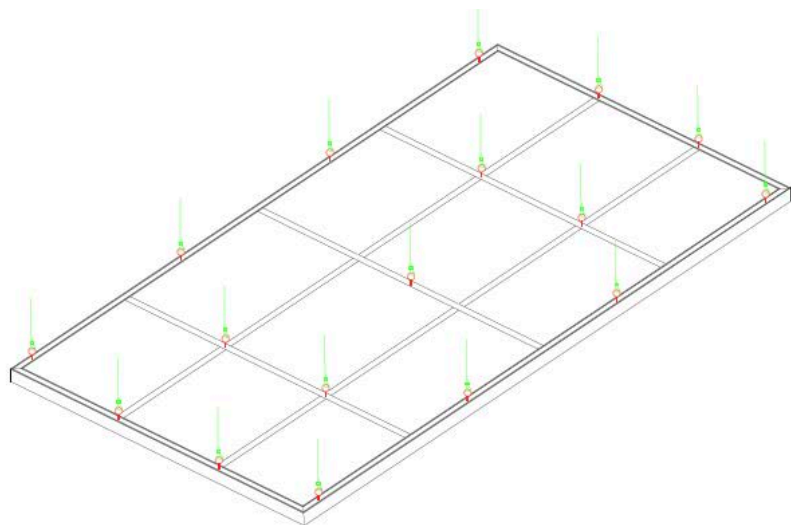

Added Details:

- Thickness of 90mm (3.6") allows LEDs along the perimeter of the profile
- Standard trim is black powder coated aluminum; unfinished and custom color trim available
- These are lighter weight and larger in size; they would be better for display in large areas
- On site assembly required for sizes over 120" x 80". For Assembly & Installation Instructions, see online resources or use the QR code to the right >



Nomenclature:

A	B	C1	C2	D	E	F	G	H	I	J
MODEL	VOLTAGE	DIMENSIONS TOP X SIDE (IN INCHES)		CRI	COLOR TEMP	POWER	MOUNTING	TRIM COLOR	FINISH	POWER SUPPLY
SWRM	24	C1xC2		90	2700K	SP	SM	AL	WSF	010V

A MODEL

SWRM - Showroom Panel

B VOLTAGE

24 - 24VDC (w/UNV
120-277 Driver)

C DIMENSIONS

C1 - Top in Inches
C2 - Side in Inches

D CRI

90 - Basic (Standard)
95 - Premium (Additional
Cost)

E COLOR TEMP

2400K - CCT **4000K** - CCT
2700K - CCT **6000K** - CCT
3000K - CCT **6500K** - CCT
3500K - CCT

CT - Color Tuning (2400K to 6000K)

RGB27W - RGB + 2700K
RGB30W - RGB + 3000K
RGB35W - RGB + 3500K
RGB40W - RGB + 4000K
RGB60W - RGB + 6000K

F POWER

SP - Standard Power

G MOUNTING

SM - Surface Mount
PM - Pendant Mount

H TRIM COLOR

AL - Aluminum (Standard)
BL - Black Powder Coat
WH - White Powder Coat
CS - Custom (Define RAL#)

I FINISH

WSF - White Stretch Fabric
PSF - Printed Stretch Fabric

J POWER SUPPLY

010V - 0-10V
ELV - Electronic Low Voltage
DMX - DMX/DALI
PI - Plug In
DPI - Dimmable Plug In